


SMD Common Mode Filter

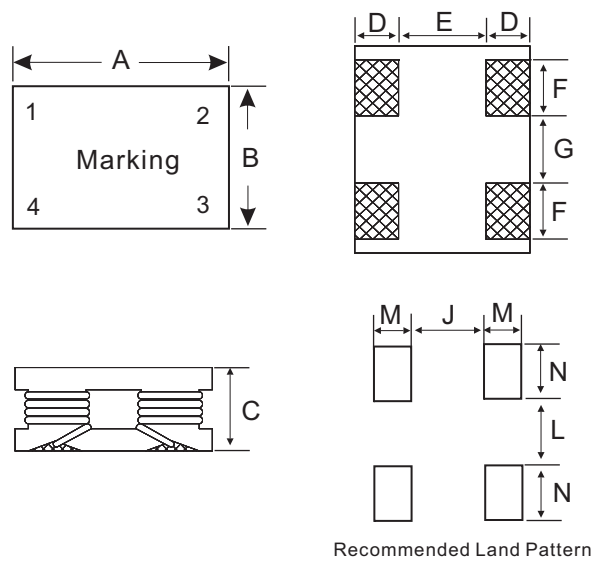


Dimensions and Footprint (Unit:mm)

Type	A	B	C	D	E	F	G	J	L	M	N
CDM763	7.5±0.5	6.0±0.5	3.2±0.3	2	1.5	2.8	2	1	0.5	2.5	3.5
CDM1085	10.0±0.5	8.0±0.5	5.0±0.5	1.8	3.3	2.8	4.4	2	3	3	3.5
CDM1210	12.0±0.5	10.8±0.5	6.0±0.5	2.5	3.7	3.2	4.4	2.8	4	3	4

Description

- Miniature high current SMD type common mode filter for fully automated assembly.
- Excellent solderability.
- Operating temperature:-40℃ to +105℃
- High impedance.
- Notebook computers,DC- DC convertors,LCD display.

Part Number Code

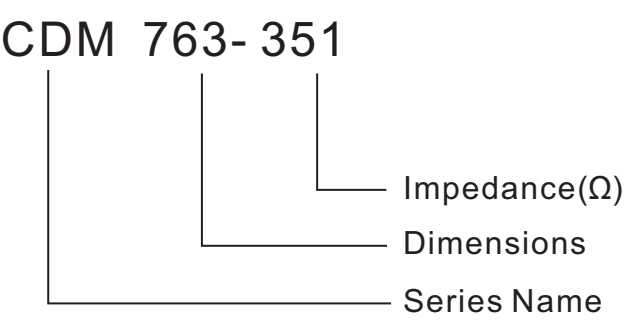

CDM763

P/N	Impedance(100MHz) (Ω)Min	DCR(Max) (m Ω)	Irms (A)
CDM763-351	350	20	5
CDM763-601	600	30	4
CDM763-701	700	30	3
CDM763-901	900	45	2

CDM1085

P/N	Impedance(100MHz) (Ω)Min	DCR(Max) (m Ω)	Irms (A)
CDM1085-501	500	10	7
CDM1085-701	700	15	5
CDM1085-901	900	15	5

CDM1210

P/N	Impedance(100MHz) (Ω)Min	DCR(Max) (m Ω)	Irms (A)
CDM1085-701	700	10	7
CDM1085-901	900	15	6