


Common Mode Inductors




Features and Applications

- 0.3 to 10A rating, low temperature.
- 0.7 to 100mH, dual chokes.
- Excellent mechanical strength
- Low resistance and temperature rise.
- Electrical Schematic:



Dimensions and Footprint (Unit:mm)

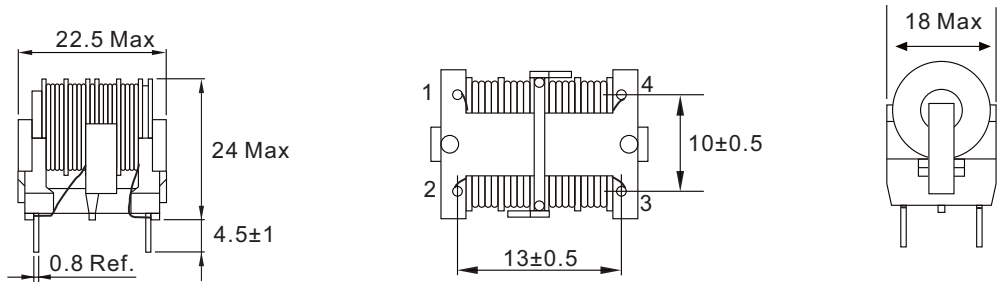

Electrical Specifications-UT20

P/N	INDUCTANCE(Min) (mH)	DCR(Max) (Ω)	IDC(Max) (A)	Leakage Inductance(Max) (uH)
UT20-601	0.6	0.06	3.0	40
UT20-242	2.4	0.18	1.7	80
UT20-622	6.2	0.50	1.0	150
UT20-123	12	0.92	0.8	200

- Special inquiries besides the above common used types can be meet on your requirement.